

Fiber optic modem **SERIES SFT-S**

SEE IT ALL

SIEMENS



FEATURES

- ▶ DATA TRANSMISSION BETWEEN 2 OPTICAL INTERFACES
- ▶ SUPPORTS SIEMENS PROTOCOL DATA EXCHANGE
- ▶ USES 2 OPTICAL MULTI-MODE FIBERS (ST CONNECTORS)
- ▶ SUPPORTS DATA TRANSMISSION UP TO 3 KM
- ▶ LED STATUS AND OPERATION INDICATION
- ▶ 10 - 30V DC POWER SUPPLY THROUGH TERMINAL BLOCKS
- ▶ (MINI)DIN ENCLOSURE

Features

PRODUCT DESCRIPTION

Description

SFT-S module from the SFT family of optical transceivers is intended for transmission of alarm informations using multi-mode (MM) optical fiber as a transfer medium. Transmitter and receiver from SFT-S series support Siemens fire alarm central stations and devices that communicate with each other by using RS 485 protocol.

Device has an inbuilt HFBR optical transceivers that enable connection of MM fibers with ST ending connectors. SFT-S needs 2 optical fibers and supports transmission lengths up to 3 km.

Power supply and serial communications are connected through serial blocks. Device is manufactured for DIN mount and is encased in non-flammable industrial plastic housing. Its small size makes it a perfect solution if mounting right into the central alarm station is needed.

On the front side of the device's housing, there are transparently placed LED indications, that offer you quick and simple insight in the basic functions of the system and the device, this LED indications also reports possible interruptions in optical link, failure of transmission equipment (both are done directly through copper connection with alarm central), presence of power supply and presence and activity of communication (exchange of protocol data).

Power supply part of the module is adjusted for direct connection to the alarm equipment (power supply DC 10 - 30V). The transmission equipment is distinguished by its low power consumption. This part of the module also includes protection against connecting the wrong voltage to it.

COMPILANT WITH AL. CENTRALS

Siemens Alarm Systems

FireSeeker FS250 -
Systems/Intelligent,
MXL - Systems/Intelligent
SXL-EX- Systems/Conventional,
FireFinder XLS Voice -
Systems/Intelligent,

Compliant


ORDERING CODE

SFT - S
Alarm Company
Siemens


Ordering code

USAGE

FIRE SYSTEMS FireSeeker FS-250 RS485

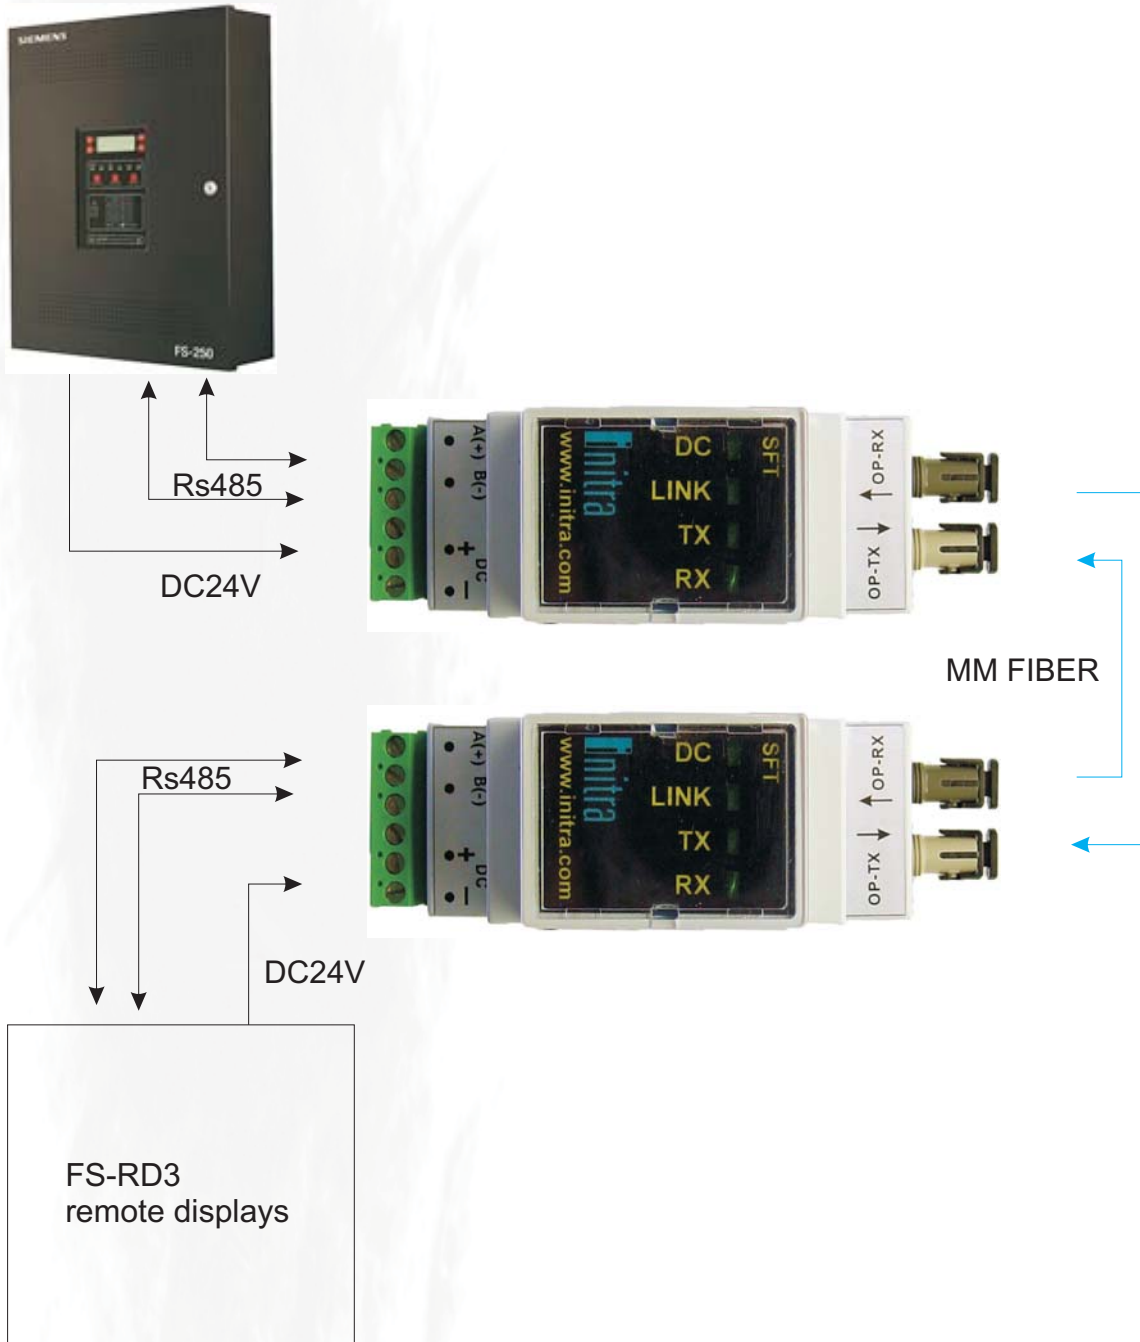

DIMENSIONS

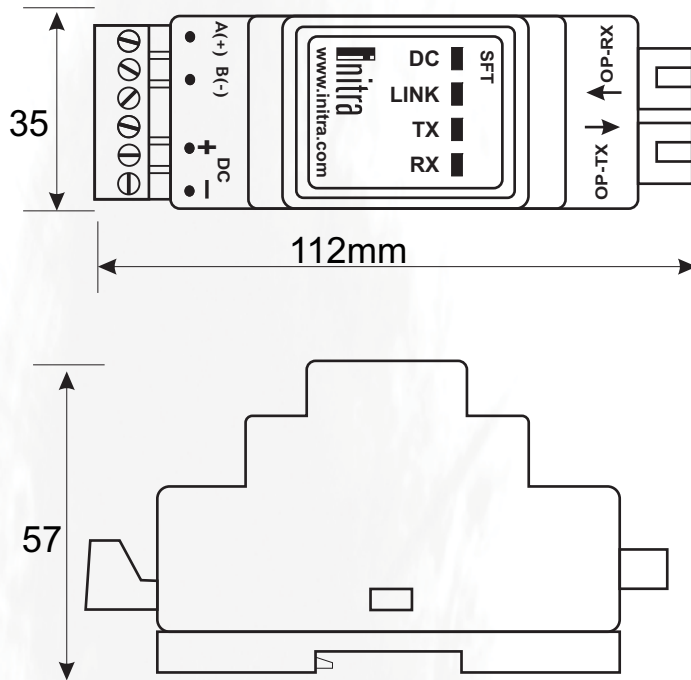

TECHNICAL DATA

OPTICS - TRANSMITTER - Multi Mode

PARAMETER	TYPE / CONDITIONS	MIN	TYPICAL	MAX	UNITS
Optical Connector	ST				
Mode	Multi Mode (MM)				
Output Center Wavelength			820		[nm]
Optical Power - Multi Mode	with 50 / 125 µm fibre		-15,8		[dBm]
Optical Power - Multi Mode	with 62.5 / 125 µm fibre		-12		[dBm]
Link Distance				3000	[m]
BER	Data rate <5 MBd		10 ⁻⁹		

OPTICS - RECEIVER - Multi Mode

PARAMETER	TYPE / CONDITIONS	MIN	TYPICAL	MAX	UNITS
Optical Connector	ST				
Mode	Multi Mode (MM)				
Output Center Wavelength			820		[nm]
Receiver Sensitivity			-21		[dBm]
Link Distance				3000	[m]



INITRA d.o.o., Slomškova 33, 1000 Ljubljana, Slovenia, EU

Tel.: +386(1)4300076

Fax.: +386(1)4300077

E-mail: info@initra.com

www.initra.com



TECHNICAL DATA

GENERAL						
PARAMETER	TYPE / CONDITIONS	MIN	TYPICAL	MAX	UNITS	
ELECTRICAL						
Power Source	24 VDC	11	24	30	[V]	
Power Consumption			1		[W]	
ENVIRONMENTAL						
Temperature range	storage	-40		+70	[° C]	
	operating	-25		+85	[° C]	
Humidity	non - condensing	0		95	[%]	
MECHANICAL - DIN						
Dimensions	Width x Depth x Height		35x112x57		[mm]	
Case type	DIN plastic enclosure					
Case material	plastic					
Mounting	DIN rail					
Weight	unit		142		[g]	
GENERAL						
Compliances	CE					
MTBF	ground fix 45°C per MIL217F		240000		[h]	
Warranty	2 years parts and labor					

